

Additional Notes

Monitor types:

In addition to DVI monitors, the Zero-Client is compatible with analog VGA and digital HDMI monitors. Simply attach a DVI-to-VGA or DVI-to-HDMI adapter to the Zero-Client's DVI connector.

Audio:

The Zero-Client uses the Realtek High-Definition Audio Codec. Windows® 7 / Vista natively contains an HD Audio driver for this Codec. For other operating systems, including Windows® XP, please install the High-Definition Audio Codec driver from www.realtek.com to use PCoIP® System's full audio capabilities.

IP Address:

The Zero-Client is set to **DHCP client** mode by default. Normally, the IP address of the Zero-Client is assigned by the DHCP server on your IP network. If your IP network does not have a DHCP server, the Zero-Client will fall back to a static IP address mode after a timeout period of approximately 2 minutes. In the fall back static IP address mode you can access the Zero-Client web interface to disable DHCP client mode and assign a static IP address. The Zero-Client's fall back IP address is **192.168.1.50**.

Zero-Client Buttons:

The Zero-Client's Power Button (1) is a multi-function button.

- A short push (< 4 seconds) powers on the Zero-Client.
- A long push (> 4 seconds) powers off the Zero-Client.
- When the Zero-Client is connected in a session, a short push will disconnect it from the Host.

Need More Help?

Please refer to the documents on the Documentation CD for more information.

This Product Covered By:

This product is covered under EVGA's warranty which covers parts and labor. For more details on the warranty length and terms of this specific product, please visit www.evga.com/warranty.

EVGA Support:

888 - 881 - EVGA (3842) www.evga.com/about/contactus

www.evga.com


E009-00-000015

EVGA

PD05 PCoIP® Visual Guide

PD05 PCoIP® Zero-Client


Top

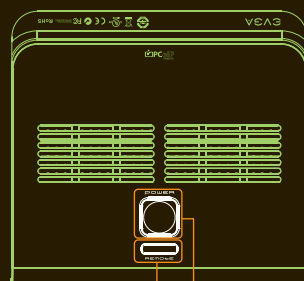

(Standby ψ) Power Button (1)

Remote PC Power Button (2)


Front

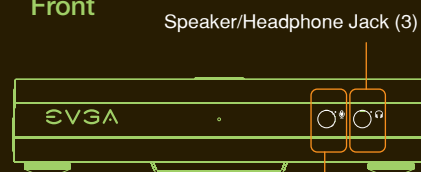

Speaker/Headphone Jack (3)

Microphone Jack (4)


Left Side

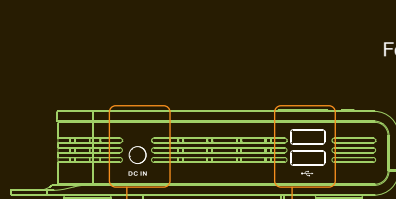

12VDC Power Jack (5)

Left USB Ports (6)

Back

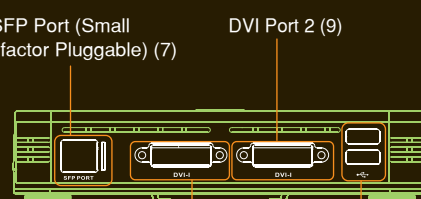

SFP Port (Small Form-factor Pluggable) (7)

DVI Port 2 (9)

DVI Port 1 (8)

Rear USB Ports (10)

Package Contents

PD05 Zero-Client Package Includes:

- Zero-Client
- Power adapter and cord
- Driver CD
- Visual Guide



WARNING

1. Always power down and disconnect devices from AC power before handling them. Failure to do this can result in personal injury or equipment damage. Some circuitry on the host PC can continue to operate even though the front panel power switch is off.
2. The Standalone Mode Power Connector on the host card must be disconnected when the host card is operating in PCI-E powered mode. Failure to do this can result in damage to the host card.

PCoIP® Zero-Client Installation

1. Be sure the monitor and the Zero-Client are turned off and disconnected from AC power.
2. Use a DVI cable to connect the monitor to the Zero-Client's DVI Port 1 (8).
3. Plug the monitor's power cable into an AC outlet and power it on.
4. If you are using dual monitors, repeat Steps 1 through 3 but connect the second monitor to the Zero-Client's DVI Port 2 (9).
5. Connect a USB keyboard and mouse to the Zero-Client's USB ports.
6. Use a Fiber cable to connect the Fiber switch or router to the Zero-Client's Fiber jack (7).
7. Connect the Zero-Client power supply to the Zero-Client's power jack (5), then plug the Zero-Client power supply into a surge-protected AC outlet. [Ambient 40°C and Input rating (12V, 3A)]
8. Optionally connect the following devices to the Zero-Client:
 - PC speaker to Speaker jack (3)
 - MIC to Microphone jack (4)
 - USB peripherals to auxiliary USB ports (6)
9. Power on the Zero-Client by pushing the power button (1).